

# SANISUB® ZPK 40A

Lifting height of 10 M

Integrated non-return valve

Automatic float release

Particle size of 30 mm



## TECHNICAL CHARACTERISTICS

Discharge	32 mm
Motor	850 Watts / 3.7A
Voltage	220-240 V / 50 Hz
Working Water Temperature	Max 90°C (intermittent)
Product Weight	6.6 kg's
Overall Measurements	212 x 342 mm
IP Rating	IP68
Motor Cable Length	10m
Q Max (m <sup>3</sup> /h)	10 (m <sup>3</sup> /h)
Max Discharge Height	10M

## WHY CHOOSE THIS PRODUCT

Portable compact in design, easy to use



Submersible pump for clean grey or rainwater

7m immersion depth

Can Handle water temperature to an average of 90° C over short periods

Integrated non-return valve

Pump up to 30mm particle size

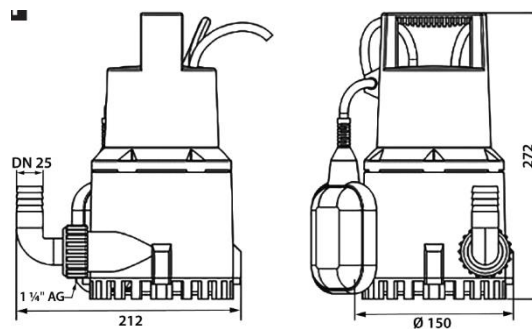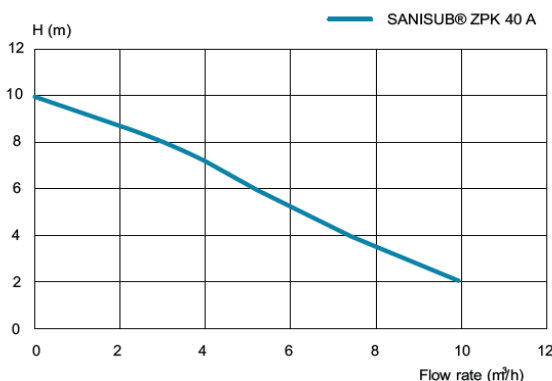

## APPLICATION



Portable pump

FOR

Domestic grey water, showers, washing machines & sinks

Sumps

Flood water

Elevator shaft

Rainwater manholes

## SANISUB® ZPK 40A



Product Reference: ZPK40A

**Saniflo**  
SFA SOUTH AFRICA  
Shaking up water

Made in France to the highest standards, needs to be installed by a licensed plumber.